

Mobile Radio Hand-Held Controller

700/800 MHz • VHF • UHF

KEY FEATURES & BENEFITS

Reliable & Rugged

- ▶ Dedicated encryption on/off button (top — not shown)
- ▶ Numeric Keypad
- ▶ Highly flexible mounting locations for convenience or privacy
- ▶ HHC can be used anywhere with or without mounting
- ▶ Line-level transmit and receive audio via interface box
- ▶ Radio programming and encryption key loading via interface box
- ▶ Compatible with subscriber programming and encryption tools with adapter
- ▶ External speaker jack in interface box
- ▶ All display functions of the 5300 Series control head
- ▶ All six programmable function buttons of the 5300 Series control head
- ▶ Adjustable display and keypad backlighting (including "off")
- ▶ Multi-function LED indicator
- ▶ Volume up/down rocker control
- ▶ Channel/zone selection rocker control

The Hand-Held Controller (HHC) is a full-featured, discreet, and convenient alternative to traditional EFJohnson mobile radio control heads. Designed primarily for law enforcement, surveillance, and executive applications, the HHC provides full radio functionality in the palm of your hand. The HHC is available as a factory option or field-installed upgrade for any remote-control-head 5300 series or Ascend mobile for all frequency bands, power levels, and software options.



EFJohnson
TECHNOLOGIES
We Respond.

www.efjohnsontechnologies.com

Handheld Controller Controls




Handheld Controller shown with 5326 100-watt trunk-mount mobile and junction box. External speaker (PN 250-0151-005), also shown, is ordered separately.

HHC Hit 250-5300-101



LCD

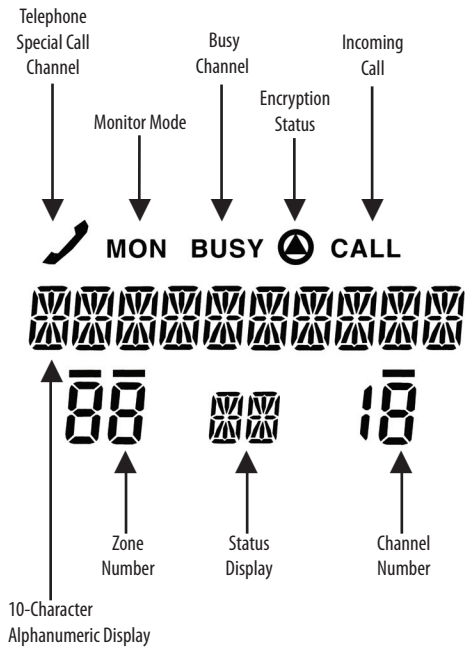

ORDERING INFORMATION

To order with the mobile radio from the factory:

- Select "Remote-Mount Option" No. 5 at time of radio order (Does not include required external speaker.)
- 250-0151-005 5" Environmentally sealed speaker with plug compatible with HHC interface junction box. (Except for phone plug, this speaker is identical to the EFJ standard speaker, 250-0151-006, which has unterminated wires.)

To order as field upgrade:

- Ensure that existing mobile has connection for remote-control head (or has already been used with remote control head).
- 250-5300-101 Field installation HHC Kit includes HHC, interface junction box, 17' radio cable. (Does not include required external speaker.)
- 250-0151-005 5" Environmentally sealed speaker with plug compatible with HHC interface junction box. (Except for phone plug, this speaker is identical to the EFJ standard speaker, 250-0151-006, which has unterminated wires.)

Related Optional Accessories

- 597-2002-267 17' HHC to Radio cable. (Included in HHC Kit). Usually needed only for spares or re-installations
- 023-5300-140 Adapter required to connect radio programming kit cable to HHC interface junction box.